



Mechanical Dimensions: Inches [mm]

Tolerances ± 0.012 [0.3] Unless Otherwise Specified

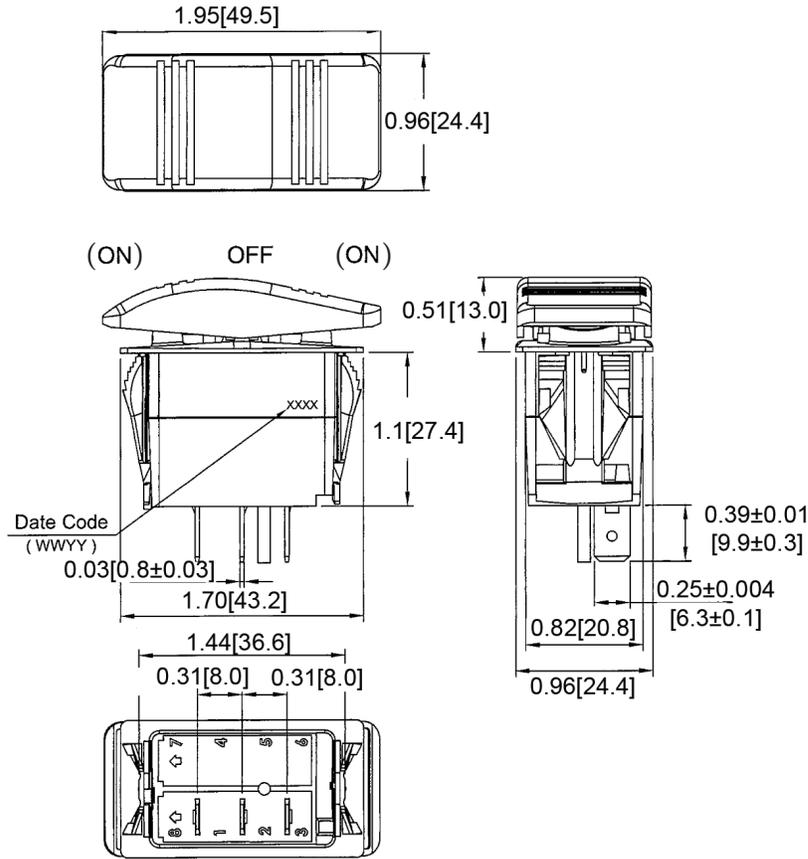


Mounting Hole

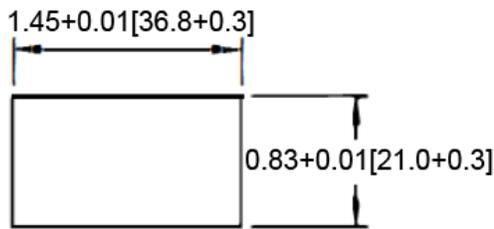

Thickness: 0.04-0.20 [1.0-5.0] max

Circuit Diagram

3P SPDT (ON)-OFF-(ON)

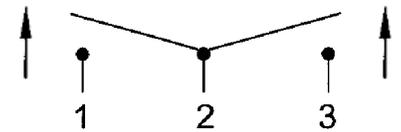

Electrical Specifications

| | |
|-----------------------|--------------------------|
| DC Rating | 21A 14V DC |
| AC Rating | 20A 125V AC, 10A 250V AC |
| Contact Resistance | 50m ohm Max. |
| Insulation Resistance | DC 500V 100M ohm Min. |
| Dielectric Strength | AC 1500V 1 minute |
| Operation Temperature | -25°C~85°C |

Material Specifications

| | |
|--------------------|-------------------------|
| Frame Actuator | Black, Nylon 66 (94V-2) |
| Terminals | Silver Plated Copper |
| Ingress Protection | IP67 |

| Rev | Date of issue | Revision Notes | Designed | Approved |
|-----|---------------|-----------------|----------|----------|
| B | 04-05-2023 | Initial Drawing | RC | OF |